CR1

Cimarron

- Die-cast aluminum housing with radius corners, complements "Southwest Series." Die-cast aluminum door with clear, flat tempered glass lens, fully gasketed to housing; Hinged door secured with two captive screws.
- Electronic ballast for 150w, 250w, 350w and 400w PSMH with 0-10V dimming capability (control system by others); Ballast pro grammed for automatic dimming also available (consult factory)
- IES Type II, III, IV and V with flat lens for full cut-off classification
- Hydroformed and segmented High Perfor mance Reflectors are field rotatable
- Easy order popular fixture & pole combinations
- Mounts on upswept or straight arms for poles or on wall bracket for uniform project look
- Mogul porcelain socket, pulse-rated with spring-loaded, nickel-plated center contact and reinforced lamp grip screw shell
- 100w - 150w Lag type, HPF ballast, starting rated at -20˚F (-40˚F HPS)
- 200w - 400w CWA type, HPF ballast, starting rated at -20˚F (-40˚F for HPS)
- Durable Lektrocote® TGIC thermoset polyester powder coat paint finish assures long life and maintenance-free service
- Listed to UL1598 for use in wet locations
- U.S. Patent No. D556,935
- IDA fixture seal of approval

ORDERING INFORMATION

CR1 - [ ] - [ ] - [ ] - F - [ ] - [ ] - [ ]

SERIES

CR1 Cimarron

MOUNTING

A Arm mount construction (6" straight rigid arm included & acceptable for 90° configurations)

AD Decorative arm mount const. (6" decorative upswept arm incl. & acceptable for 90° configurations)

WB Wall bracket const. (includes wall bracket & 6" straight arm unless WBAD option is chosen which substitutes decorative upswept arm)

0 No arm or wall bracket (only order without arm or wall bracket when they are ordered as an accessory)

SOURCE/WATTAGE

ELECTRONIC PULSE START METAL HALIDE

E15 150w (ED-28 Mog base)
E25 250w (ED-28 Mog base)
E35 350w (ED-28 Mog base)
E40 400w (ED-28 Mog base)

PULSE START METAL HALIDE

P10 100w (ED-17 Med base)
P12 125w (ED-17 Med base)
P15 150w (ED-28 Mog base)
P17 175w (ED-28 Mog base)
P20 200w (T-15 Mog base)
P25 250w (ED-28 Mog base)
P32 320w (ED-28 Mog base)
P35 350w (ED- Mog base)
P40 400w (ED-28 Mog base)

HIGH PRESSURE SODIUM

S10 100w (ED-23.5 Mog base)
S15 150w (ED-23.5 Mog base)
S25 250w (ED-18 Mog base)
S40 400w (ED-18 Mog base)

LAMP ORIENT./DISTR.

H2 Horiz. II - hydroformed
H3 Horiz. III - hydroformed
H3P Horiz. III - High Performance Series (segmented)
H4 Horiz. IV - multi-piece
H4P Horiz. IV High Performance Series(segmented) with integral house-side shield
H5 Horiz. V (square) - hydroformed
H5P Horiz. V - High Performance Series (segmented)

LENS

F Flat

VOLTAGE

Q[1] Quad-Tap® 120/208/240/277V
V[1] Five-Tap 120/208/240/277/480V (250 & 400w PSMH & HPS only)
5 480V
T[1] Tri-Tap® 120/277/347V
E 50Hz, 220/240V (250 & 400w PSMH & HPS only)
0 No Ballast
1 120V (350 & 400w eHID)
J 208/240/277V (350 & 400w eHID only)
0 120/208/240/277V (150 & 240w eHID only)
F 347V

COLOR

DB Dark Bronze
BL Black
WH White
GR Gray
PS Platinum Silver
RD Red (premium color)
FG Forest Green (premium color)
CC Custom Color (consult factory)

OPTIONS

WBAD Substitutes decorative upswept arm when WB wall bracket mounting is chosen
RPA2 Round pole adapter (2 3/4-3 1/8")
RPA3 Round pole adapter (3 1/4-3 3/4")
RPA4 Round pole adapter (3 7/8-4 1/2")
RPA5 Round pole adapter (5")
RPA6 Round pole adapter (6")
F(X) Fusing (replace X with voltage: 1-120, 2-208, 3-240, 4-277, 5-480, 6-347)
P(X) Photo button (replace X with voltage: 1-120, 2-208, 3-240, 4-277, 6-347)
PR(X) Photo cell receptacle (replace X with voltage: 1-120, 2-208, 3-240, 4-277, 5-480, 6-347)
QZ Quartz RS with lamp
HS Internal house side shield (available for H2, H3 & H4 distributions)
VG Polycarbonate vandal guard
L Lamp

1 Factory wired for highest voltage unless specified
Note: Mounting A and AD acceptable for 90 degree configurations

NOTE: All poles to be drilled with #2 pattern,

SEE PAGE 613 FOR ACCESSORIES

EASY ORDER FIXTURE AND POLE COMBINATIONS

Catalog Number	Description
CRPC-1-P25-H3-20	20ft 250w PMH, Type III
CRPC-1-P40-H3-20	20ft 400w PMH, Type III
CRPC-1-P40-H3-25	25ft 400w PMH, Type III
CRPC-1-P40-H4-20	20ft 400w PMH, Type IV
CRPC-1-P40-H4-25	25ft 400w PMH, Type IV
Twin Configurations	
CRPC-2-P25-H3-20	20ft 250w PMH, Type III
CRPC-2-P40-H3-20	20ft 400w PMH, Type III
CRPC-2-P40-H3-25	25ft 400w PMH, Type III
CRPC-2-P40-H4-20	20ft 400w PMH, Type IV
CRPC-2-P40-H4-25	25ft 400w PMH, Type IV

All Combos include lamp, anchor bolts, poles and fixtures, color is Dark Bronze

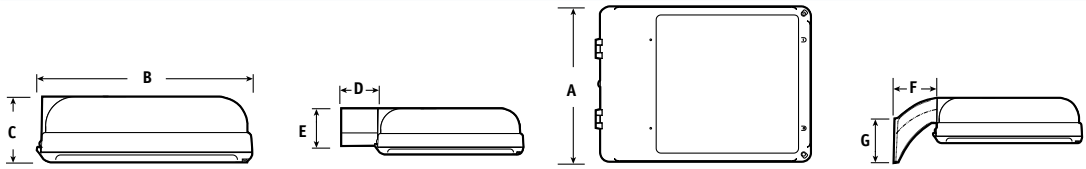

	A	B	C	D	E	F	G	EPA	Weight
	16"	21 3/4"	6 3/4"	6"	5 5/8"	6 5/16"	5 5/8"	1.2 ft²	44 lbs.
CR1	406mm	552mm	171mm	152mm	143mm	160mm	143mm	0.1 m²	20 kg

Note: EPA and weight values do not include mounting arm.
See Spaulding EPA Value pgs. 622-623 for more detailed information.

SPAULDING LIGHTING