

DALLAS-LPS SERIES

| | | |
|--------|------|-----------|
| Cat. # | | Approvals |
| Job | Type | |

SPAULDING LIGHTING

APPLICATIONS


- Superior lighting uniformity is provided for school campuses, financial institutions, walkways, office parks, and auto dealerships.

SPECIFICATIONS

- Round, spun aluminum housing with embossed decorative band. Optional color vinyl trim stripe available.
- Cast aluminum door with clear, flat tempered glass lens, fully gasketed to housing, secured with hinge and captive screws. Housing with spider mount hinges up, and door with arm mount hinges down for service.
- Specular, anodized aluminum reflector designed for two lamps provides Type V light pattern. IESNA full cutoff classified.
- Extruded aluminum arm required for pole mount. Spider mount has four aluminum tube arms attaching housing to cast slipfitter or 2.375" OD tenon.
- Lamps and lamp support devices included. Enclosed sockets, with nickel-plated brass contacts for single-ended, bayonet base LPS lamps.
- HR type ballast, HPF, starting rated at -20°F.
- Durable Lektrocote® TGIC thermoset polyester powder coat paint finish assures long life and maintenance-free service.

LISTINGS/CERTIFICATIONS

- UL 1598 and CSA listed for outdoor use in wet locations. 
- IDA fixture seal of approval. 

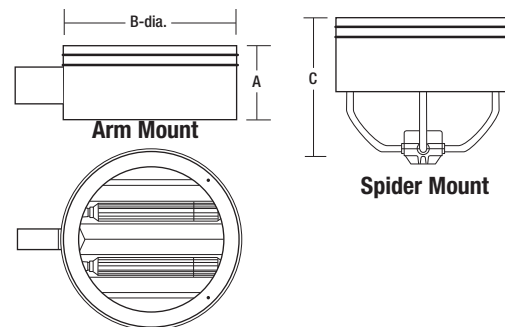


| | A | B | C | EPA | Weight |
|---------|--------|--------|--------|----------------------|---------|
| DL3-LPS | 10.75" | 26" | 23.0" | 1.5 ft. ² | 65 lbs. |
| | 273 mm | 660 mm | 584 mm | 0.1 m ² | 29.5 kg |

NOTE: EPA and weight values do not include mounting arm

ORDERING INFORMATION

ORDERING EXAMPLE: DL3-A-L55-H5-F-5-PS-F5

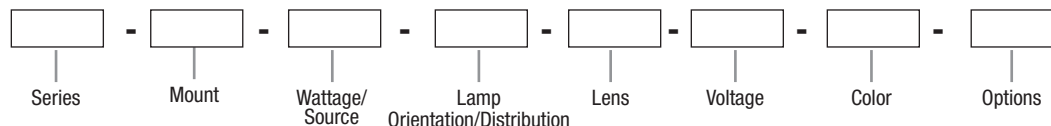

SERIES

DL3 Dallas 3 - LPS

MOUNT

A Arm Mount (arm not included, order separately)

ST Spider Mount (2.375" tenon)

WATTAGE/SOURCE¹

LOW PRESSURE SODIUM

L35 35W (T-17)

L55 55W (T-17)

L90 90W (T-17)

LAMP ORIENTATION/DISTRIBUTION

H5 Horizontal V (square)

LENS

F Flat

VOLTAGE

Q Quad-Tap® - 120/208/240/277V²

T 120/277/347V CSA²

5 480V

COLOR

DB Dark Bronze

BL Black

WH White

GR Gray

PS Platinum Silver

RD Red (premium color)

FG Forest Green (premium color)

CC Custom Color (consult factory)

OPTIONS

F1 Fusing - 120V

F2 Fusing - 208V

F3 Fusing - 240V

F4 Fusing - 277V

F5 Fusing - 480V

F6 Fusing - 347V

PR1 Photo Cell Receptacle - 120V

PR2 Photo Cell Receptacle - 208V

PR3 Photo Cell Receptacle - 240V

PR4 Photo Cell Receptacle - 277V

PR5 Photo Cell Receptacle - 480V

PR6 Photo Cell Receptacle - 347V

RDB Reveal (Dark Bronze)

RBL Reveal (Black)

RWH Reveal (White)

RGR Reveal (Gray)

RPS Reveal (Platinum Silver)

RRD Reveal (Red)

RFG Reveal (Forest Green)


VG Polycarbonate Vandal Guard

¹ Lamps and lamp support devices included.

² Factory wired for highest voltage unless specified.

ORDERING INFORMATION

ORDERING EXAMPLE ARM: ARM-R-6-S-DB

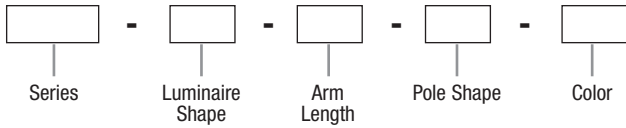

SERIES

ARM Rigid Arm

LUMINAIRE SHAPE

R Round

ARM LENGTH

6 6" Arm (EPA=0.24 ft², 3.5 lbs)
(0.02 m², 1.5 kg)

10 10" Arm (EPA=0.4 ft², 5.0 lbs)
(0.03 m², 2.2 kg)

POLE SHAPE

#1 DRILL PATTERN FOR POLE

S Square

R4 Round Straight (4.5")

R5 Round Straight (5")

R6 Round Straight (6")

#2 DRILL PATTERN FOR POLE

T2 Round Tapered (2.5")

T3 Round Tapered (3")

T35 Round Tapered (3.5")

T4 Round Tapered & Straight (4")

COLOR

DB Dark Bronze

BL Black

WH White

GR Gray

PS Platinum Silver

RD Red (premium color)

FG Forest Green (premium color)

CC Custom Color (consult factory)


OPTION

P(X) Photobutton (replace X with voltage; 1- 120, 2- 208, 3 240, 4- 277, 6- 347)

Note: Arms for square pole. Adapters needed for other pole shapes.

WALL BRACKET

WB-R-XX Bracket and 6" arm included
Replace **XX** with color designation

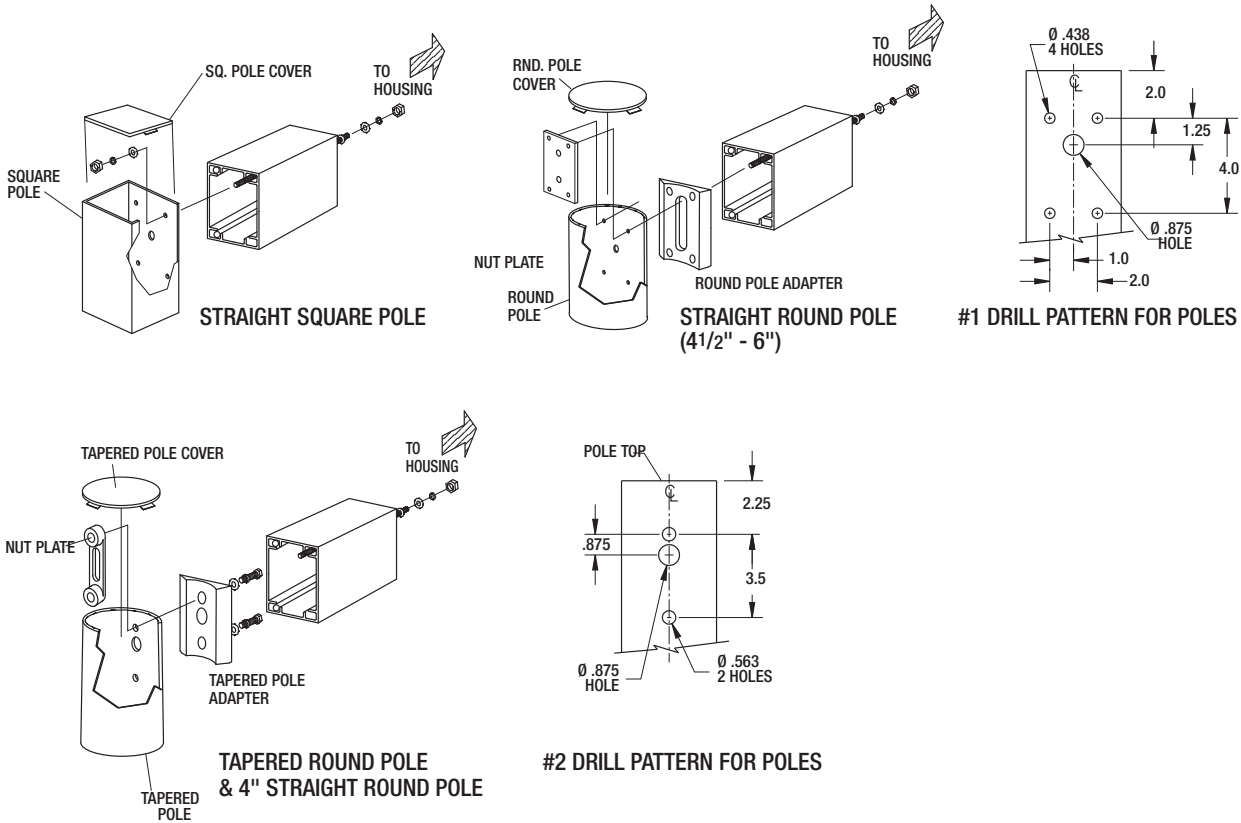

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

SPAULDING
LIGHTING

Spaulding Lighting • 701 Millennium Drive • Greenville, SC 29607 • PHONE: 864-678-1000

For more information visit our web site: www.spauldinglighting.com