

MODESTO SERIES

Cat. #		Approvals
Job	Type	

**SPAULDING
LIGHTING**

APPLICATIONS


- Walkways and courtyards

SPECIFICATIONS

- Extruded aluminum square or round housing, with tamper resistant hardware. Flat top, or optional dome top for round MO2. Single screw access for top relamping
- Thread-on glass diffuser and matte black polycarbonate louvers enclose lamp
- Medium porcelain socket, pulse rated, with spring-loaded, nickel-plated center contact and reinforced lamp grip screw shell
- Concealed, galvanized steel anchor base. Four 1/2" x 10" anchor bolts on 4" diameter bolt circle
- HPF ballast, starting rated at -20°F (-40°F for HPS). Pulse Start Metal Halide is CWA or Super CWA type. HPS is CWA, HR, or Reactor type
- Durable Lektrocote® TGIC thermoset polyester powder coat paint finish assures long life and maintenance-free service

LISTINGS/CERTIFICATIONS

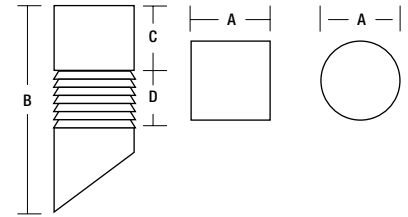




- Listed to UL1598 for use in wet locations
- IDA fixture seal of approval
- IESNA full cuoff classified




	A	B	C	D	Weight
MO1	6.75" sq. 171 mm	42.0" 1067 mm	6.0" 152 mm	3.75" 95 mm	41 lbs 19 kg
MO2	7.0" dia 178 mm	42.0" 1067 mm	6.0" 152 mm	3.75" 95 mm	41 lbs 19 kg

ORDERING INFORMATION

ORDERING EXAMPLE: M01-P15-Q-DB-L

	-		-		-		-	
SERIES		SOURCE/WATTAGE		VOLTAGE		COLOR		OPTIONS
M01 Modesto Square M02 Modesto Round		PULSE START METAL HALIDE P50 50w (ED-17) P70 70w (ED-17) P10 100w (ED-17) P12 125w (ED-17) P15 150w (ED-17) HIGH PRESSURE SODIUM S35² 35w (ED-17) S50 50w (ED-17) S70 70w (ED-17) S10 100w (ED-17) S15 150w (ED-17)		Q¹ Quad-Tap® 120/208/240/277V T^{1,3} Tri-Tap® 120/277/347V (CSA) 1 120V 5 480V		DB Dark Bronze BL Black WH White GR Gray PS Platinum Silver RD Red (premium color) FG Forest Green (premium color) CC Custom Color (consult factory)		DM Dome top (round only) 24 24" Luminaire height 30 30" Luminaire height 36 36" Luminaire height F(X) Fusing (replace X with voltage: 1-120, 2-208, 3-240, 4-277, 5-480, 6-347) HS120 Internal shield - 120° HS180 Internal shield - 180° L Lamp



1 Factory wired for highest voltage unless specified
 2 120V only
 3 70 or 100w system only

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

**SPAULDING
LIGHTING**

Spaulding Lighting • 701 Millennium Drive • Greenville, SC 29607 • PHONE: 864-678-1000

For more information visit our web site: www.spauldinglighting.com