

# PALOMAR-LPS SERIES

Cat. #		Approvals
Job	Type	

**SPAULDING**  
LIGHTING

## APPLICATIONS


- Parking areas, office parks, schools, and walkways

## SPECIFICATIONS

- Formed and welded aluminum housing. Integral ballast mounted on rear door offers tool-free servicing. Secured with separable hinges and two trunk latches
- Formed aluminum door with clear, flat or convex polycarbonate lens, fully gasketed to housing. Separable hinges and trunk latches provide tool-free entry
- Specular, anodized aluminum, and prepainted white aluminum reflector combines to provide Type II, Short cutoff light pattern with flat lens; and Type III, Short Semi-cutoff light pattern with convex lens
- Cast aluminum mast arm fitter for 2.375" OD horizontal arm, with set/leveling bolts, welded to housing
- Lamp and lamp support device included. Enclosed socket, with nickel plated brass contact for single-ended, bayonet base LPS lamp
- HR type ballast, HPF, starting rated at -20°F. Terminal block provided
- Photo receptacle included less cell
- Durable Lektrocote® TGIC thermoset polyester powder coat paint finish assures long life and maintenance-free service

## LISTINGS/CERTIFICATIONS


- Listed to UL1598 for use in wet locations
- IDA fixture seal of approval when configured with flat lens
- IESNA full cutoff classification configured with flat lens

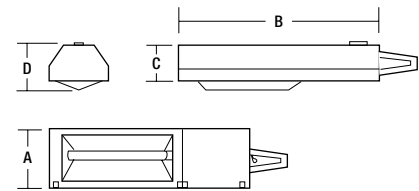

	A	B	C (arm)	D (arm)	EPA	Weight
<b>PR-LPS35</b>	9.5" 241 mm	37.0" 940 mm	5.5" 140 mm	7.0" 178 mm	1.2 ft. <sup>2</sup> 0.1 m <sup>2</sup>	30 lbs 13.6 kg
<b>PR-LPS55</b>	9.5" 241 mm	37.0" 940 mm	5.5" 140 mm	7.0" 178 mm	1.2 ft. <sup>2</sup> 0.1 m <sup>2</sup>	30 lbs 13.6 kg
<b>PR-LPS90</b>	9.5" 241 mm	41.0" 1042 mm	5.5" 140 mm	7.0" 178 mm	1.4 ft. <sup>2</sup> 0.1 m <sup>2</sup>	32 lbs 14.5 kg
<b>PR-LPS135</b>	9.5" 241 mm	51.0" 1296 mm	5.5" 140 mm	7.0" 178 mm	1.7 ft. <sup>2</sup> 0.2 m <sup>2</sup>	39 lbs 17.7 kg
<b>PR-LPS180</b>	9.5" 241 mm	64.0" 1626 mm	5.5" 140 mm	7.0" 178 mm	2.0 ft. <sup>2</sup> 0.2 m <sup>2</sup>	44 lbs 19.9 kg

## ORDERING INFORMATION

ORDERING EXAMPLE: PR-A-L55-H2-F-Q-DB-F1

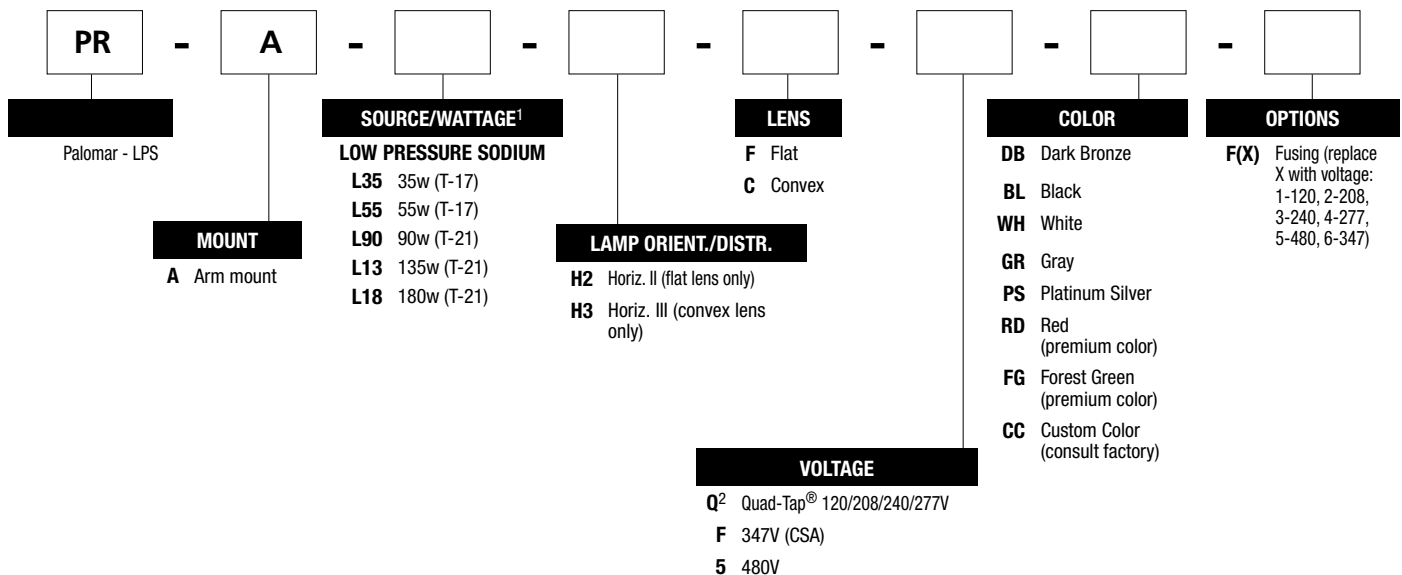

1 Lamps and lamp support devices included  
2 Factory wired for highest voltage unless specified

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

**SPAULDING**  
LIGHTING

Spaulding Lighting • 701 Millennium Drive • Greenville, SC 29607 • PHONE: 864-678-1000

For more information visit our web site: [www.spauldinglighting.com](http://www.spauldinglighting.com)

Copyright © 2011 SPAULDING LIGHTING All Rights Reserved PALOMARLPS-SPEC8/11 Printed in USA